


LONG RADIUS

All advantages at a glance

- ▶ Can be operated either as a stand-alone solution
- ▶ ...or as part of a fully automatic linked system
- ▶ Lower unit costs thanks to highly effective parts processing
- ▶ Rosler developed and manufactured vibratory drive motor with an efficiency of approx. 90%
- ▶ Durable design, low maintenance
- ▶ Machine concept also suitable for start-ups

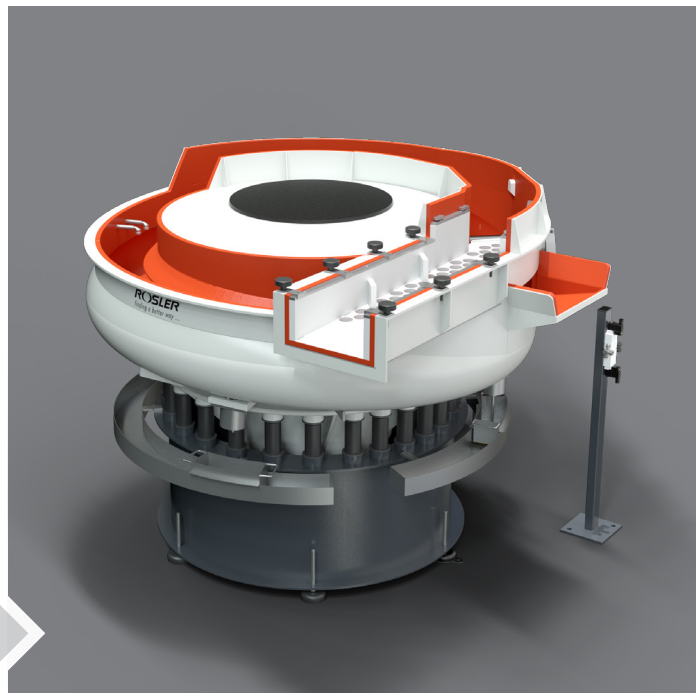

Type:	R 250/5 LR	R 310/5 LR	R 310/9 LR	R 400/9 LR	R 480/8 LR
Lenght work bowl (m)	5.200	5.000	9.200	8.500	8.000
Machine width (mm)	2.075	2.075	3.430	3.055	3.300
Machine width min (mm)	1.150	1.170	1.370	1.480	1.450
Machine width max (mm)	1.355	1.360	1.786	1.865	1.675
Work bowl width (mm)	240	295	320	400	480
Discharge height (mm)	1.074	1.080	1.240	1.510	1.400
Work bowl height (mm)	230	270	300	390	480
Machine length (mm)	2.230	2.230	3.505	3.175	3.200
Total volume (l)	175	300	475	1.000	1.470
Vibratory drive (kW)	7,5	7,5	7,5	22	22